



INDEL B S.p.A.
Loc. Cà Baldone
47866 S. Agata Feltria (RN) ITALY
Tel.: +39 0541 848 711 - Fax: +39 0541 848 000
www.indelb.it
indelb@indelb.it

TB15-18




:

TB15 TB18

12 24



12-24V



	TB15	TB18
()	360x235x565 ()	405x235x565 ()
	8,2	8,6
	35	35
	12-24 V	12-24 V
	10 A	10 A
	+10 -18 °C	+10 -18 °C
	Danfoss (SECOP) BD	Danfoss (SECOP) BD
	R134 a	R134 a
	15	18






15

(.) ,

10

		()	
		12 V	24 V
2,5	²	2,5	5
4	²	4	8
6	²	6	12



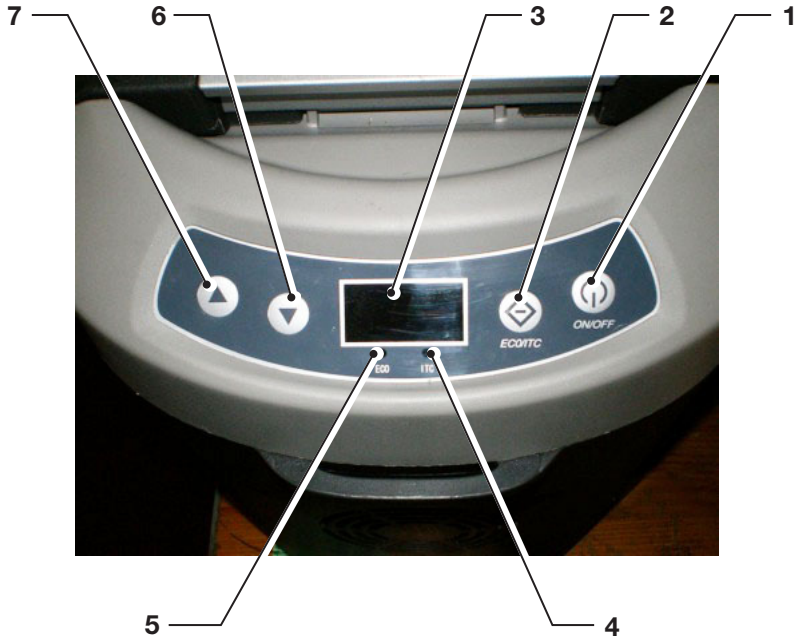

- 1 -
- 2 - ECO/ITC -
- 3 -
- 4 -
- 5 -
- 6 -
- 7 -

1,





7
6
2.
4 5.
2,000 /
ITC
1 °
13 26
1 °
12 25 ()



O.C. -

() ITC 3 ° :
0 °
0 ° ()

1. PRO –
2. OF1, OF2, OF3 –
3. F-C –
4. - -

2-6-7

2.

6 7,

6 7.

(PRO)

			12V	24V
MIN.	1	-- -- --	9.6	21.3
MED.	2	≡ ≡ ≡	10.1	22.3
MAX.	3	≡ ≡ ≡	11.1	24.



OFF - SET (OF1, OF2, OF3)

OFF - SET

OFF - SET () -2 °,

!

-6 °

OF1.
2 °



-7 ° -12 °

OF2.
4 °



-13 °

OF3.
4 °



(F-C)

: /

F C



(OC)

()



90

1		R6
2		R8
3	0.6 ,	R2
4		R4
5	:	R5
6	():	LO
7		---

- ;
-)



!

- a)
-)
-)
-)
-)
-)



Indel B



STAMPATO SU CARTA RICICLATA.
RECYCLED PAPER.

